

REMARKS

By this Amendment, claims 1-24 are cancelled, and claims 25-48 are added. Thus, claims 25-48 are active in the application. Reexamination and reconsideration of the application are respectfully requested.

The specification and abstract have been carefully reviewed and revised in order to correct grammatical and idiomatic errors in order to aid the Examiner in further consideration of the application. The amendments to the specification and abstract are incorporated in the attached substitute specification and abstract. No new matter has been added.

Also attached hereto is a marked-up version of the substitute specification and abstract illustrating the changes made to the original specification and abstract.

In item 2 on page 2 of the Office Action, claims 1-6 were rejected under 35 U.S.C. § 103(a) as being unpatentable over Smith et al. (U.S. 6,192,407). This rejection is believed to be moot in view of the cancellation of claims 1-25.

Furthermore, the Applicants respectfully submit that this rejection is inapplicable to new claims 25-48 for the following reasons.

The present invention provides a data distribution system which includes an information terminal operable to request distribution of information including image information, video information or audio information, and an information provider apparatus operable to provide the information to the information terminal.

In the data distribution system of the present invention, the information terminal transmits its specifications at the same time when transmitting an information provision request which requests distribution of the information including image information, video information or audio information from the information provider apparatus. The information provider apparatus transmits the requested image, video or audio information to the information terminal by detecting, from a data storage unit, information corresponding to the information requested in the information provision request, and converting the detected information to data having a quality which is adaptable to an information reproduction capability of the information terminal which is determined by the specifications of the information terminal.

Therefore, according to the data distribution system of the present invention, it is possible to transmit appropriate information which reflects the information reproduction capabilities of the information terminal, and to appropriately charge for the transmitted data according to the information reproduction capabilities of the information terminal. In other words, an information user of the information terminal is not charged for higher quality versions of requested information if the information user's information terminal does not possess the information reproduction capabilities to properly reproduce the higher quality versions of the requested information. These novel features of the present invention are recited in each of new claims 25 and 37.

In particular, new claim 25 recites that the information terminal is operable to automatically transmit specifications of the information terminal when transmitting an information provision request which requests distribution of the information including image information, video information or audio information. The information provider apparatus of new claim 25 is recited as comprising a data detection unit operable to detect data from a data storage unit corresponding to the received information provision request. The information provider apparatus of new claim 25 is also recited as comprising a data conversion unit operable to convert the data detected by the detection unit to data having a quality which is adaptable to an information reproduction capability of the information terminal which is determined by the received information terminal specifications.

New claim 37 recites that the information terminal is operable to automatically transmit an information terminal ID of the information terminal when transmitting an information provision request which requests distribution of the information including image information, video information or audio information. The information provider apparatus of new claim 37 is recited as comprising a receiving unit operable to receive the information provision request and the information terminal ID transmitted from the information terminal, and to detect the specifications of the information terminal corresponding to the received information terminal ID from an information terminal database. The information provider apparatus of new claim 37 is also recited as comprising a data detection unit operable to detect data from a data storage unit corresponding to the received information provision request. Further, the information provider apparatus of new claim 37 is recited as comprising a data conversion unit

operable to convert the data detected by the data detection unit to data having a quality which is adaptable to an information reproduction capability of the information terminal which is determined by the information terminal specifications that are detected by the receiving unit.

Smith et al. discloses a document delivery system which generates private Uniform Resource Locators (PURLs) to distribute information, where each PURL uniquely identifies an intended recipient of a document, a document or a set of documents to be delivered and other parameters which are specific to the delivery process. The PURLs do not attach information to a message (e.g., e-mail) to send documents to an intended recipient. Instead, the PURLs attach a general reference to a document to be sent, and then enable the recipient to access a document via the attached reference. Further, Smith et al. discloses that the reference attached to the document can be intercepted by a server in order to decrypt a document or to provide tracking capabilities by noticing and recording when the intended recipient accesses the transmitted document (see Column 15, lines 4-27).

The document delivery system of Smith et al. includes a sender 300 who sends a document 310, and a server 315 which stores the documents and generates a PURL for each intended recipient 320 of the document. The server 315 generates the PURL by encoding user information and document information and delivery parameters or transaction identifiers within the PURL. The server 315 then forwards the PURL to each intended recipient 320 so as to notify the recipient 320 that a document has been sent to him or her (see Column 15, lines 28-42 and Figure 20).

Smith et al. discloses that in order to access the document, the recipient 320 presents the received PURL to the server 315, whereupon the server 315 determines the next action to be taken, such as whether to require a password from the recipient 320 before the document can be accessed, whether to log that the document was accessed successfully or that the delivery of the document was successful in a database. In addition, the server can log the IP address of the recipient 320, or the server can log the IP address of any subsequent access to a given document with the same PURL (see Column 15, line 43 to Column 16, line 20).

Accordingly, Smith et al. merely discloses that a PURL is generated by a server 315 and that an intended recipient 320 uses the PURL to access a document. On page 2 of the Office Action, the Examiner asserted that the PURL attributes associated with delivery would include information terminal specifications in order to secure document delivery, tracking of document receipts and format capability. However, even with this interpretation of Smith et al., Smith et al. clearly does not disclose or suggest each and every limitation of new claims 25 and 37.

As described above, the inventions of new claims 25 and 37 each recite that the information terminal transmits its specifications or information terminal ID at the same time when requesting the information provider apparatus to provide information including image information, video information or audio information, and the information providing apparatus provides the requested information by converting data having a quality which is adaptable to an information reproduction capability of the information terminal which is determined by the information terminal specifications of the information terminal that are received or detected by a receiving unit of the information providing apparatus.

On the other hand, the specifications disclosed in Smith et al. are in no way related to the capability of recipient 320 to reproduce multimedia information such as image, video or audio data, because the specifications disclosed in Smith et al. are merely directed to specifying a terminal which has requested the transmission of confidential data. That is, the specifications of Smith et al. are not used for determining whether to convert a document to be adaptable to an information reproduction capability of the intended recipient 320 of the document.

Accordingly, Smith et al. clearly does not disclose, suggest or even contemplate a data conversion unit which is operable to to convert the data detected by the detection unit to data having a quality which is adaptable to an information reproduction capability of the information terminal which is determined by the received information terminal specifications, as recited in new claim 25.

Similarly, Smith et al. also clearly does not disclose, suggest or even contemplate a data conversion unit operable to convert the data detected by the data detection unit to data having a quality which is adaptable to an information reproduction capability of the

information terminal which is determined by the information terminal specifications that are detected by the receiving unit, as recited in new claim 37.

Therefore, new claims 25 and 37 are clearly patentable over Smith et al. since Smith et al. fails to disclose or suggest each and every limitation of new claims 25 and 37.

Furthermore, in view of the clear distinctions discussed above, the Applicants respectfully submit that it would not have been obvious to modify the system of Smith et al. in order to cure its apparent deficiencies so as to arrive at the inventions of new claims 25 and 37. The inventions of new claims 25 and 37 permit multimedia information to be reproduced even if it is unable to be reproduced by the information terminal or has a poor reproduction quality in its original state. This novel feature of the present invention is accomplished by, as recited in new claims 25 and 37, converting the quality of the multimedia information to be transmitted to the information terminal according to the reproduction capability of the information terminal. Smith et al. does not even fathom the situation where a recipient 320 cannot reproduce a document, and hence, one skilled in the art would not have been motivated to substantially modify the obvious deficiencies of Smith et al. in order to convert a document 310 according to the reproduction capabilities of the recipient 320, where the reproduction capabilities of the recipient 320 are determined from the specifications of the recipient 320 in a PURL.

Accordingly, notwithstanding the fact that Smith et al. clearly fails to disclose or suggest each and every limitation of new claims 25 and 37, for the foregoing reasons, no obvious modification of Smith et al. would cure the deficiencies of Smith et al. to result in the inventions of new claims 25 and 37.

Therefore, new claims 25 and 37 are clearly patentable over Smith et al.

In item 5 on page 4 of the Office Action, claims 7-24 were rejected under 35 U.S.C. § 103(a) as being unpatentable over Smith et al. in view of Shaffer et al. This rejection is believed to be moot in view of the cancellation of claims 1-24.

As demonstrated above, Smith et al. clearly fails to disclose, suggest or even contemplate each and every limitation of new claims 25 and 37. Furthermore, for the following reasons, the Applicants respectfully submit that Shaffer et al. clearly does not

cure the deficiencies of Smith et al. for failing to disclose or suggest each and every limitation of new claims 25 and 37.

Shaffer et al. discloses a system and method for exchanging attached files in a multi-application environment. Shaffer et al. discloses that when an intended recipient of information does not include the resources to format the file of an attachment to another data format, a format converter 30 of the server performs the file-format conversion of the attachment for the recipient so as to conserve the recipient's time and to free up computer resources of the recipient (see Column 2, lines 30-42, Column 4, lines 45-54 and Figure 1).

However, even though Shaffer et al. discloses a server for converting the format an attachment to an e-mail, Shaffer et al., similar to Smith et al., clearly does not disclose or suggest converting data to have a quality which is adaptable to an information reproduction capability of the information terminal, as recited in new claims 25 and 37. Accordingly, similar to Smith et al., Shaffer et al. also does not disclose or suggest transmitting an appropriate data quality which reflects the information reproduction capabilities of the information terminal, and appropriately charging for the transmitted data according to the information reproduction capabilities of the information terminal.

Therefore, neither Smith et al. nor Shaffer et al., either individually or in combination, disclose or suggest each and every limitation of new claims 25 and 37.

Accordingly, no obvious combination of Smith et al. and Shaffer et al. would result in the inventions of new claims 25 and 37 since neither Smith et al. nor Shaffer et al., either individually or in combination, disclose or suggest each and every limitation of new claims 25 and 37.

Furthermore, it is submitted that the clear distinctions discussed above are such that a person having ordinary skill in the art at the time the invention was made would not have been motivated to modify Smith et al. and Shaffer et al in such as manner as to result in, or otherwise render obvious, the present invention as recited in new claims 25 and 37.

Therefore, it is submitted that the new claims 25 and 37, as well as new claims 26-36 and 38-38 which depend therefrom, are clearly allowable over the prior art as applied by the Examiner.


In view of the foregoing amendments and remarks, it is respectfully submitted that the present application is clearly in condition for allowance. An early notice thereof is respectfully solicited.

If, after reviewing this Amendment, the Examiner feels there are any issues remaining which must be resolved before the application can be passed to issue, the Examiner is respectfully requested to contact the undersigned by telephone in order to resolve such issues.


A fee and a Petition for a one-month Extension of Time are filed herewith pursuant to 37 CFR § 1.136(a).

Respectfully submitted,

Hiroshi MIYAWAKI

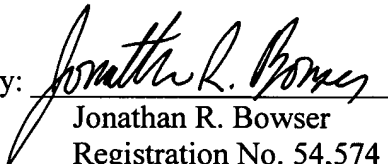By: 
Jonathan R. Bowser
Registration No. 54,574
Attorney for Applicant

JRB/nrj
Washington, D.C. 20006-1021
Telephone (202) 721-8200
Facsimile (202) 721-8250
April 22, 2005



DATA DISTRIBUTION SYSTEM

FIELD OF THE INVENTION

The present invention relates to a data distribution system and, more particularly, to a data distribution system which can distribute image or music data of a quality level that is optimal ~~optimum~~ for specifications of an information terminal which is used by an information user.

BACKGROUND OF THE INVENTION

In recent years, various kinds of information such as image data and music data can be easily obtained via the Internet. Conventionally, as a common means for obtaining these image data or music data, image servers or music servers are accessed from a personal computer to download data, and thereafter the downloaded data are reproduced. However, recently, information terminals which reproduce data ~~which~~ that are downloaded by logging on networks as they are have been developed successively, and specifications of the information terminals of information users have ~~been~~ become more diversified.

For example, as examples of the information terminals which receive and reproduce image or music data that is distributed on the Internet, there are Internet radios which log on the Internet via telephone lines to access radio stations all over the world and reproduce voices or music, printers which log on the Internet via intracompany local area networks to access still-picture data of high resolution on large screens and directly print the still

pictures, Internet televisions which log on the Internet via cable modems to access plural moving picture servers and reproduce moving pictures, and the like.

However, the respective servers retain the image or music data that is distributed via the Internet in diverse data formats. These data formats do not always conform to the specifications of the information terminals that are used by the information users.

Further, the specifications of the information terminals that are used by the information users are also diversified, and therefore formats of data transmitted from the servers may not conform to the specifications of the information terminals which reproduce the data, whereby the data cannot be reproduced.

Accordingly, to address the diversification of the reproduction functions of the information terminals, ~~part of some~~ image or music data providers ~~suggest~~ have suggested a system in which image or music data of plural different data formats are retained on the server ends and data are provided according to the specifications of the information terminals that are used by the information users.

Further, in Japanese Published Patent Application No. Hei.6-223122 or No. Hei.9-181910, systems are disclosed in which data formats are converted on the server ends so as to conform to the specifications of an information terminal which is designated by an information user, and thereafter the data are distributed and charged.

However, in the above-mentioned systems, the specification of the information terminal should be designated every time the information user downloads data, which results ~~resulting in a great inconvenience or problem to at least the information user troubles.~~

Further, the information user should always correctly remember the functions or specifications of the information terminal to be used and correctly input the same, and besides, although the information user utilizes the same information terminal to access the same server, the same contents should be inputted again and again.

Further, when the information user does not designate the specifications of the information terminal or erroneously inputs the same, image data or music data of a higher quality level, which cannot be reproduced by that information terminal, may be transmitted and accordingly more charges than required should be paid. ~~Or~~ Alternatively, image data or music data of a lower quality level which is below the reproduction ability of the information terminal may be transmitted, and thus, the functions of the information terminal cannot be sufficiently utilized.

Furthermore, when an information user uses plural information terminals, although the information user has already downloaded image data or music data with one information terminal and been charged for the data, when the information user downloads the same data again by using another information terminal, the user is always charged additionally.

SUMMARY OF THE INVENTION

~~The~~ Accordingly, an object of the present invention ~~has for its object is~~ to provide a data distribution system which can distribute image or music data that ~~which~~ is suitable for specifications of an information terminal from a server end when distribution of the image or music data is requested by an information user using the information terminal, without the need of inputting and transmitting the specifications of the information terminal each time, ~~as well as and which~~ can charge each information user according to the contents of the distributed data.

Other objects and advantages of the present invention will become more apparent from the following detailed description. ~~and specific~~ Specific embodiments described herein are provided only for illustration since various additions and modifications within the spirit and scope of the present invention will be apparent to those of skill in the art from the detailed description.

According to a ~~1st~~ first aspect of the present invention, there is provided a data distribution system which comprises an information terminal for requesting distribution of information and an information provider apparatus for providing information to the information terminal, ~~comprising:-~~ the ~~The~~ information terminal automatically ~~transmitting~~ transmits specifications of the information terminal when transmitting an information provision request which requests distribution of information, ~~and~~. ~~the~~ The information provider apparatus ~~including~~ includes: a

receiving unit for receiving the information provision request and the information terminal specifications which are transmitted from the information terminal; a data storage unit for storing and managing various kinds of information data; a data detection unit for detecting data corresponding to the information provision request which is received by the receiving unit from the data storage unit; a data conversion unit for converting the data that is detected by the data detection unit so as to conform to the information terminal specifications which are received by the receiving unit; and a transmission unit for transmitting the data that is converted by the data conversion unit to the information terminal.

According to a ~~2nd~~second aspect of the present invention, there is provided a data distribution system which comprises an information terminal for requesting distribution of information and an information provider apparatus for providing information to the information terminal, ~~comprising:~~ the ~~The~~ information terminal automatically transmitting an information terminal ID of the information terminal when transmitting an information provision request which requests distribution of information; ~~and~~ the ~~The~~ information provider apparatus ~~including~~ includes: an information terminal database for storing and managing the information terminal ID and specifications of the information terminal in pair (in correspondence with each other); a receiving unit for receiving the information provision request and the information terminal ID transmitted from the information terminal

and detecting whether the specifications of the information terminal, ~~corresponding~~ correspond to the information terminal ID, from the information terminal database; a data storage unit for storing and managing various kinds of information data; a data detection unit for detecting data from the data storage unit corresponding to the information provision request which is received by the receiving unit ~~from the data storage unit~~; a data conversion unit for converting the data detected by the data detection unit so as to conform to the information terminal specifications received by the receiving unit; and a transmission unit for transmitting the data converted by the data conversion unit to the information terminal.

According to a ~~3rd~~ third aspect of the present invention, in accordance with the data distribution system of the ~~1st~~ first aspect, the information provider apparatus further includes a charge management unit for deciding an amount of charges according to the contents of data that is transmitted to the information terminal, and charging an information user.

According to a ~~4th~~ fourth aspect of the present invention, in accordance with the data distribution system of the ~~2nd~~ second aspect, the information provider apparatus further includes a charge management unit for deciding an amount of charges according to the contents of data that is transmitted to the information terminal, and charging an information user.

According to a ~~5th~~ fifth aspect of the present invention,

in accordance with the data distribution system of the ~~3rd~~third aspect, the information provider apparatus further includes a client database for storing and managing utilization histories of information users, ~~and~~. Further, the charge management unit decides an amount of charges according to utilization history of an information user, which is stored in the client database, and the contents of data that is transmitted to the information terminal, and charges the information user.

According to a ~~6th~~sixth aspect of the present invention, in accordance with the data distribution system of the ~~4th~~fourth aspect, the information provider apparatus further includes a client database for storing and managing utilization histories of information users, ~~and~~. Further, the charge management unit decides an amount of charges according to utilization history of an information user, which is stored in the client database, and contents of data that is transmitted to the information terminal, and charges the information user.

According to a ~~7th~~seventh aspect of the present invention, in accordance with the data distribution system of any one of the ~~1st~~first to ~~6th~~sixth aspects, when a target for the information provision request which is transmitted from the information terminal to the information provider apparatus is still picture data, the specifications of the information terminal include information of at least one selected from a number of pixels, a tone, a compression ratio, a compression method, a number of

reproducible pictures, and a storage capacity.

According to an ~~8th~~eightth aspect of the present invention, in accordance with the data distribution system of any one of the ~~1st~~first to ~~6th~~sixth aspects, when a target for the information provision request which is transmitted from the information terminal to the information provider apparatus is moving picture data, the specifications of the information terminal include information of at least one selected from a number of pixels, a tone, a compression ratio, a compression method, a reproduction time, and a storage capacity.

According to a ~~9th~~ninth aspect of the present invention, in accordance with the data distribution system of any one of the ~~1st~~first to ~~6th~~sixth aspects, when a target for the information provision request which is transmitted from the information terminal to the information provider apparatus is audio data, the specifications of the information terminal include information of at least one selected from a sampling rate, a frequency band, a compression ratio, a compression method, a reproduction time, and a storage capacity.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram illustrating an example of a data distribution system according to a first embodiment of the present invention.

Figure 2 is a flowchart for explaining an example of an operation of an information provider apparatus in the data

distribution system of the first embodiment.

Figure 3 is a diagram showing an example of specifications of an information terminal.

Figure 4 is a diagram showing an example of data which is stored in a charge database of the information provider apparatus according to the first embodiment.

Figure 5 is a block diagram illustrating an example of a data distribution system according to a second embodiment of the present invention.

Figure 6 is a diagram showing an example of data which is stored in an information terminal database of an information provider apparatus according to the second embodiment.

Figure 7 is a flowchart for explaining an example of the operation of the information provider apparatus in the data distribution system of the second embodiment.

Figure 8 is a block diagram illustrating an example of a data distribution system according to a third embodiment of the present invention.

Figure 9 is a flowchart for explaining an example of an operation of an information provider apparatus in the data distribution system of the third embodiment.

Figure 10 is a flowchart for explaining an example of a charging process of an information management apparatus in the data distribution system of the third embodiment.

Figure 11 is a diagram showing an example of data which is

stored in a client database of the information provider apparatus of the third embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, data distribution systems according to the present invention will be described with reference to ~~figures~~the drawings. The embodiments shown here are only exemplary and the present invention is not restricted to these embodiments.

~~{Embodiment 1}~~First Embodiment

A data distribution system according to a first embodiment of the present invention automatically transmits specifications of information terminals from the information terminals to a data conversion server, thereby enabling distribution of image or music data of a quality level which is ~~optimum~~optimal for an information terminal that is used by an information user.

Hereinafter, the data distribution system of the first embodiment will be described in more detail with reference to figures 1 to 4.

Figure 1 is a block diagram illustrating an example of the data distribution system according to the first embodiment.

In figure 1, the data distribution system comprises an information terminal 11 which is used by an information user, and an information provider apparatus 12 for distributing information to the information user.

The information terminal 11 can log on the information provider apparatus 12 through a communication line, and ~~it~~the

information terminal 11 makes an information provision request which requests the information provider apparatus 12 to distribute information such as music or image data, ~~as well as~~. The information terminal 11 also automatically transmits specifications of the information terminal 11 to the information provider apparatus 12. Further, when the requested information such as image or music data is distributed from the information provider apparatus 12, the information terminal 11 receives the data.

Here, the communication line includes not only common telephone lines but also various special lines and ISDN lines.

The specifications of the information terminal 11 represent the format of data which is requested by the information terminal 11. When still picture information is requested, the specifications include information such as the number of pixels, the tone, the compression ratio, the compression method, the number of reproducible pictures, and the storage capacity. When moving picture information is requested, the specifications include information such as the number of pixels, the tone, the compression ratio, the compression method, the reproduction time, and the storage capacity. Further, when audio information is requested, information such as the sampling rate, the frequency band, the compression ratio, and the compression method is included.

These specifications of the information terminal 11 are previously stored in a memory (not shown) of the information terminal 11 and automatically transmitted to the information provider

apparatus 12 when the information provision request is transmitted.

The information provider apparatus 12 comprises a receiving unit 101, a data detection unit 102, a data storage unit 103, a data conversion unit 104, a charge management unit 105, a charge database 106 and a transmission unit 107.

The receiving unit 101 receives the information provision request and the information terminal specifications which are transmitted from the information terminal 11, ~~and~~ outputs the information provision request to the data detection unit 102, and outputs the information terminal specifications to the data conversion unit 104, respectively.

The data detection unit 102 receives the information provision request, detects data corresponding to the information provision request from the data storage unit 103, and outputs the detected data to the data conversion unit 104.

The data storage unit 103 stores and manages various kinds of information data.

The data conversion unit 104 converts the data corresponding to the information provision request, outputted from the data detection unit 102, into a data format according to the information terminal specifications which are received by the receiving unit 101, ~~and~~ outputs the converted data to the transmission unit 107, ~~as well as~~ and outputs charge information to the charge management unit 105, ~~which~~. The charge information is information relating to the contents of the data to be transmitted to the information

terminal 11, such as the type of pre-conversion data, the amount of the data, the format of post-conversion data and the date of utilization, and is used for deciding the amount of charges.

The charge management unit 105 decides the amount of charges based on the basis of the charge information which is outputted from the data conversion unit 104 ~~with~~ by using a charge data table that is stored in the charge database 106, and collects charges from the user who uses the information terminal 11 by using a method such as electronic payment.

The transmission unit 107 transmits the data which has been converted by the data conversion unit 104 into the data format depending on the specifications of the information terminal, to the information terminal 11. The transmission unit 107 may have a structure which simultaneously notifies the user of the amount of charges that is decided by the charge management unit 105.

~~Next, the~~ The operation of the data distribution system will now be described.

Hereinafter, the operation of the information provider apparatus 12, which is started by the transmission of an information provision request and information terminal specifications from the information terminal 11, will be described with reference to figure 2.

Figure 2 is a flowchart for explaining an example of the operation of the information provider apparatus 12 in the data distribution system according to the first embodiment.

(S101) The receiving unit 101 receives an information provision request and information terminal specifications from the information terminal 11. At this time, the information provision request which is transmitted from the information terminal 11 is outputted to the data detection unit 102, and the information terminal specifications are outputted to the data conversion unit 104, respectively.

(S102) The data detection unit 102 retrieves data corresponding to the information provision request from the data storage unit 103 based on ~~the basis of~~ the information provision request which is transmitted from the information terminal 11, and outputs the retrieved data corresponding to the information provision request to the data conversion unit 104.

(S103) The data conversion unit 104 judges whether the format of the data that is detected by the data detection unit 102 conforms to the information terminal specifications which are received by the receiving unit 101, ~~with~~ by using the data that is detected by the data detection unit 102 and the information terminal specifications received by the receiving unit 101. Consequently, when the format conforms to the specifications of the information terminal 11, the operation proceeds to step S104, and when the format does not conform to the specifications, the operation proceeds to step S105.

(S104) When the format of the detected data conforms to the specifications of the information terminal 11, the data conversion

unit 104 outputs the data as it is to the transmission unit 107,
~~as well as~~ and outputs charge information, which is information
concerning the contents of the data to be transmitted to the
information terminal 11, to the charge management unit 105.

(S105) When the format of the detected data does not conform
to the specifications of the information terminal, the data
conversion unit 104 converts the data into a data format which
conforms to the specifications of the information terminal, ~~and~~
outputs the converted data to the transmission unit 107, ~~as well~~
~~as~~ and outputs the charge information, which is information
concerning the contents of the data to be transmitted to the
information terminal 11, to the charge management unit 105.

(S106) The charge management unit 105 decides the amount
of charges by using a charge data table that is stored in the charge
database 106, based on ~~the basis of~~ the charge information which
is outputted from the data conversion unit 104, ~~which~~ where the
charge information is information concerning the contents of the
data to be transmitted to the information terminal 11. The decided
amount of charges is collected from the user of the information
terminal 11 as the information user, ~~with~~ by using a method such
as electronic payment.

(S107) The transmission unit 107 transmits the data that
is outputted from the data conversion unit 104, conforming to the
specifications of the information terminal, to the information
terminal 11, and ends the processing.

Next, ~~a~~a method for deciding the amount of charges by the charge management unit 105 in the information provider apparatus 12 will now be described in detail with reference to figures 1, 3 and 4.

When the charge information as information concerning the contents of the data to be transmitted to the information terminal 11 is outputted from the data conversion unit 104, the charge management unit 105 decides the amount of charges by using the charge data table stored in the charge database 106.

Here, a description will be given of a case where the charge information is composed of the type of pre-conversion data and the format of post-conversion data, and the amount of charges is decided based on ~~the basis of~~ the charge information ~~with~~ by using the charge data table stored in the charge database 106.

For example, when the specifications of the information terminal as shown in figure 3 are transmitted to the information provider apparatus 12 together with an information provision request which requests a still picture A, charge information indicating that the type of pre-conversion data is the still picture A and that the format of post-conversion data is under the specifications of the information terminal shown in figure 3 is outputted from the data conversion unit 104 to the charge management unit 105.

Figure 4 is a diagram showing an example of the charge data table that is stored in the charge database 106 of the information

provider apparatus 12. The charge management unit 105 decides a basic charge for the type of data to be transmitted and a transmission format charge which depends on the data format of the data, based on the basis of the charge data table shown in figure 4, and adds the basic charge and the transmission format charge so as to obtain the amount of charges.

More specifically, the amount of charges is obtained by adding a basic charge ~~●~~ corresponding to the still picture A and a transmission format charge ~~●~~ corresponding to the specifications of the information terminal shown in figure 3.

It is unnecessary ~~that for~~ the transmission format charge ~~should be always~~ to always be a positive value. For example, when data is converted into an image of a lower quality, the amount of data to be transmitted is reduced as compared to the pre-conversion data. Accordingly, the transmission format charge of a negative value can be set and the amount of charges in this case is a value which is lower than the basic charge.

Thereafter, the charge management unit 105 collects the amount of charges from the user who uses the information terminal ~~with by~~ using a method such as electronic payment.

As described above, according to the data distribution system of the first embodiment, specifications of an information terminal are automatically transmitted together with an information provision request for an information provider apparatus. Therefore, the information provider apparatus can transmit image

data or music data which conform to the specifications of the information terminal, ~~as well as~~ and the information terminal can receive image data or music data of an ~~optimum~~ optimal data format, whereby excessive data or the like which cannot be reproduced by the information terminal are not transmitted. Further, the information provider apparatus decides the amount of charges according to the format of data which is transmitted to the information terminal, whereby the information user is charged properly.

~~{Embodiment 2}~~ Second Embodiment

Hereinafter, a data distribution system according to a second embodiment of the present invention will be described with reference to figures 5 to 7.

Figure 5 is a block diagram illustrating the data distribution system according to the second embodiment. The data distribution system of the second embodiment is different from that of the first embodiment only in that an information terminal database 202 for storing and managing specifications of an information terminal is included in an information provider apparatus 22, and the information terminal specifications are not transmitted from the information terminal 21 when the specifications of the information terminal are stored in the information terminal database 202. The same reference numerals as those in the first embodiment denote the same components.

In figure 5, the data distribution system comprises an

information terminal 21 which is used by an information user, and an information provider apparatus 22 which distributes information to the information user.

The information terminal 21 can log on the information provider apparatus 22 via a communication line. The information terminal 21 makes an information provision request which requests the information provider apparatus 22 to distribute information such as music data or image data, ~~as well as~~ and the information terminal 21 automatically transmits an information terminal ID of the information terminal 21. At this time, when information terminal specifications corresponding to the information terminal ID of the information terminal 21 are not registered in the information terminal database 202 in the information provider apparatus 22, a specification transmission command is issued from the information provider apparatus 22, and then the information terminal 21 automatically transmits the specifications of the information terminal 21 to the information provider apparatus 22 another time. Further, when requested information such as image data and music data is distributed from the information provider apparatus 22, the information terminal 21 receives the data.

Here, the communication line includes not only common telephone lines but also various special lines, ISDN lines and the like.

The specifications of the information terminal represent the format of data which is requested by the information terminal

21. When still picture information is requested, the specifications include information such as the number of pixels, the tone, the compression ratio, the compression method, the number of reproducible pictures, and the storage capacity. When moving picture information is requested, information such as the number of pixels, the tone, the compression ratio, the compression method, the reproduction time, and the storage capacity is included. When audio information is requested, information such as the sampling rate, the frequency band, the compression ratio, and the compression method is included.

The specifications and the information terminal ID of the information terminal 21 are previously stored in a memory (not shown) which is included in the information terminal 21, and are transmitted to the information provider apparatus 22 as required.

The information provider apparatus 22 comprises a receiving unit 201, a data detection unit 102, a data storage unit 103, a data conversion unit 104, a charge management unit 105, a charge database 106, a transmission unit 107 and an information terminal database 202.

The receiving unit 201 receives an information provision request and outputs the request to the data detection unit 102, ~~as well as~~ receives an information terminal ID which is transmitted from the information terminal 21, and checks whether information terminal specifications corresponding to the information terminal 21 ID are included in data which are composed of information terminal

IDs and information terminal specifications in pair (in correspondence with each other), which data are stored and managed in the information terminal database 202.

When the information terminal specifications corresponding to the information terminal ID are not included in the information terminal database 202, the receiving unit 201 issues a specification transmission command to the information terminal 21, receives the information terminal specifications which are transmitted from the information terminal 21, and outputs the specifications to the data conversion unit 104. On the other hand, when the information terminal specifications corresponding to the information terminal ID are included in the information terminal database 202, these information terminal specifications are outputted to the data conversion unit 104 by the receiving unit 201.

The information terminal database 202 stores and manages the information terminal IDs and the information terminal specifications in pair, as shown in figure 6. In this second embodiment, when the information terminal specifications are newly transmitted from the information terminal 21, these information terminal IDs and information terminal specifications are automatically registered. At the next access by the information terminal 21, the specifications of the information terminal 21 are decided based on the basis of the registered information terminal ID and information terminal specifications. Here, the information

terminal ID and the information terminal specifications may be previously registered, for example, when the information user subscribes to the data distribution system according to the present invention.

~~Next, the~~ The operation of the data distribution system will now be described.

Hereinafter, the operation of the information provider apparatus 22, which is started by the transmission of an information provision request and an information terminal ID from the information terminal 21, will be described with reference to figure 7.

Figure 7 is a flowchart for explaining an example of the operation of the information provider apparatus 22 in the data distribution system according to the second embodiment.

(S201) The receiving unit 201 receives an information provision request and an information ID which are transmitted from the information terminal 21.

(S202) Thereafter, the receiving unit 201 outputs the information provision request to the data detection unit 102, ~~as well as~~ and checks whether information terminal specifications corresponding to the received information terminal ID are stored in the information terminal database 202. At this time, when the information terminal specifications corresponding to the information terminal ID are stored in the information terminal database 202, the operation proceeds to step S203. ~~When~~ On the

other hand, when the information terminal specifications corresponding to the information terminal ID are not stored, the operation proceeds to step S204.

(S203) When the information terminal specifications corresponding to the information terminal ID are stored in the information terminal database 202, these information terminal specifications are detected and outputted to the data conversion unit 104.

(S204) When the information terminal specifications corresponding to the information terminal ID are not stored, the receiving unit 201 transmits a specification transmission command to the information terminal 21 via the transmission unit 107, and requests the information terminal 21 to transmit the specifications of the information terminal 21.

At this time, when receiving the specification transmission command from the information provider apparatus 22, the information terminal 21 automatically transmits the specifications of the information terminal 21 to the information provider apparatus 22.

(S205) The receiving unit 201 receives the information terminal specifications which are transmitted from the information terminal 21, and outputs these information terminal specifications to the data conversion unit 104.

(S206) Further, the receiving unit 201 registers the previously received information terminal ID and the information terminal specifications which are transmitted in accordance with

the specification transmission command in pair, in the information terminal database 202. Thereby, in the case of a subsequent accesses to the information provider apparatus 22 by using the information terminal 21 having this information terminal ID, the information provision apparatus 22 can transmit image data or music data which conform to the specifications of the information terminal without the information terminal specifications of the information terminal 21 being transmitted from the information terminal 21, and can reduce loads on the network, which is required for transmitting the information terminal specifications from the information terminal 21 to the information provider apparatus 22.

The operation in the following steps S102 to S107 are the same as that of the information provider apparatus 12, which is described in the first embodiment with reference to figure 2.

Further, the method for deciding the amount of charges by the charge management unit 105 in the information provider apparatus 22 is also the same as that described in the first embodiment with reference to figures 1, 3 and 4.

As described above, according to the data distribution system of the second embodiment, the information provider apparatus can transmit image data or music data which conform to the specifications of the information terminal, ~~as well as~~ and the information terminal can receive image data or music data of an optimum data format. Therefore, excessive data or the like which cannot be reproduced by the information terminal are not transmitted, and further, the

information provider apparatus decides the amount of charges according to the format of data which is transmitted to the information terminal, whereby the information user is charged properly.

Further, according to the data distribution system of the second embodiment, the information provider apparatus has the information terminal database, whereby the specifications of the information terminal can be specified by using only the information terminal ID which is transmitted from the information terminal. Accordingly, ~~when the information terminal accesses the information provider apparatus,~~ the transmission of the information terminal specifications is not required every time when the information terminal accesses the information provider apparatus, whereby the loads on the network are reduced. Therefore, the latency time that is required for transmitting the specifications of the information terminal can be eliminated, ~~whereby~~ and as a result, the information user can obtain necessary information speedily.

~~{Embodiment 3}~~ Third Embodiment

Hereinafter, a data distribution system according to a third embodiment of the present invention will be described with reference to figures 8 to 11.

Figure 8 is a block diagram illustrating an example of the data distribution system according to the third embodiment. The data distribution system of the third embodiment is different from

the above-mentioned described data distribution system of the first embodiment only in that a client database 303 for storing and managing utilization histories of information users is included in an information provider apparatus 32, ~~and~~. Further, in the data distribution system of the third embodiment, when an information user is charged, a charge management unit 302 decides the amount of charges based on ~~the basis of~~ charge information as information concerning the contents of data to be transmitted to an information terminal 31, and utilization history information which is stored in the client database 303 as the utilization history of the information user, and then charges the information user. The same reference numerals as those in the first embodiment denote the same components.

In figure 8, this data distribution system comprises an information terminal 31 which is used by an information user, and an information provider apparatus 32 which distributes information to the information user.

The information terminal 31 can log on the information provider apparatus 32 via a communication line. The information terminal 31 transmits an information provision request which requests the information provider apparatus 32 to distribute information such as music data or image data, ~~as well as~~ and automatically transmits specifications of the information terminal 31 and a client ID for identifying the information user, to the information provider apparatus 32. Further, when the requested

information such as image data or music data is distributed from the information provision apparatus 32, the information terminal 31 receives the data.

Here, the communication line includes not only common telephone lines but also various special lines, ISDN lines and the like.

Further, the information terminal specifications represent the format of data which is requested by the information terminal 31. When still picture information is requested, the specifications include information such as the number of pixels, the tone, the compression ratio, the compression method, the number of reproducible pictures and the storage capacity. When moving picture information is requested, information such as the number of pixels, the tone, the compression ratio, the compression method, the reproduction time and the storage capacity is included. Further, when audio information is requested, information such as the sampling rate, the frequency band, the compression ratio and the compression method is included.

The information terminal specifications and the client IDs are previously stored in a memory (not shown) which is included in the information terminal, and are automatically transmitted to the information provider apparatus 32 at the transmission of an information provision request.

The information provider apparatus 32 comprises a receiving unit 301, a data detection unit 102, a data storage unit 103, a

data conversion unit 104, a charge database 106, a transmission unit 107, a charge management unit 302 and a client database 303.

The receiving unit 301 receives an information provision request, specifications of the information terminal ~~7~~ 31 and a client ID, which are transmitted from the information terminal 31, ~~and~~ outputs the information provision request to the data detection unit 102, outputs the information terminal specifications to the data conversion unit 104, and outputs the client ID to the charge management unit 302, ~~respectively~~.

The charge management unit 302 decides the amount of charges based on the basis of utilization history information which is stored in the client database 302 ~~7~~ and which is ~~an a~~ utilization history of an information user, and charge information, which is information that is outputted from the data conversion unit 104, ~~concerning concerns~~ contents of data to be transmitted to the information terminal 31, such as the type of pre-conversion data, the amount of the data, the format of post-conversion data and the data of utilization, and is information which is used for deciding the amount of charges, ~~and~~. The charge management unit 302 then collects the amount of charges from the information user who uses the information terminal 31 ~~7~~ with by using a method such as electronic payment.

Here, the utilization history information is the history of information concerning the charges for the information user, and ~~it~~ the utilization history information may be any information

such as the type of provided data, the format of the provided data, the data of utilization and the amount of charges, as long as it is information concerning the charges for the information user.

Further, after charging the information user, the charge management unit 302 registers the information concerning the charges in the client database 303 as the utilization history information of the information user, which is identified by the client ID that is outputted from the receiving unit 301.

The client database 303 stores and manages client IDs for identifying information users and the charge history information in pair, which are registered by the charge management unit 302.

~~Next, the~~The operation of the data distribution system will now be described.

Hereinafter, the operation of the information provider apparatus 32, which is started by the transmission of an information provision request, information terminal specifications and a client ID from the information terminal 31, will be described with reference to figure 9.

Figure 9 is a flowchart for illustrating an example of the operation of the information provider apparatus 32 in the data distribution system according to the third embodiment.

(S301) The receiving unit 301 receives an information provision request, information terminal specifications, and a client ID from the information terminal 31. At this time, the information provision request that is transmitted from the

information terminal 31 is outputted to the data detection unit 102, the information terminal specifications are outputted to the data conversion unit 104, and the client ID is outputted to the charge management unit 302, respectively.

(S102) The data detection unit 102 retrieves data corresponding to the information provision request from the data storage unit 103 based on the basis of the information provision request that is transmitted from the information terminal 31, and outputs the retrieved data corresponding to the information provision request to the data conversion unit 104.

(S103) The data conversion unit 104 judges whether the format of the data which is detected by the data detection unit 102 conforms to the information terminal specifications that are received by the receiving unit 301, ~~with~~ by using the data which is detected by the data detection unit 102 and the information terminal specifications that are received by the receiving unit 301. Consequently, when the format of the detected data conforms to the information terminal specifications, the operation proceeds to step S104, and when the format of the detected data does not conform to the specifications, the operation proceeds to step S105.

(S104) When the format of the detected data conforms to the information terminal specifications, the data conversion unit 104 outputs the data as it is to the transmission unit 107, ~~as well as~~ and outputs charge information, which is information concerning the contents of the data to be transmitted to the information

terminal 31, to the charge management unit 302.

(S105) When the format of the detected data does not conform to the information terminal specifications, the data conversion unit 104 converts the data into a data format conforming to the information terminal specifications and outputs the converted data to the transmission unit 107, ~~as well as~~ and the data conversion unit 104 outputs charge information, which is information concerning the contents of the data to be transmitted to the information terminal 31, to the charge management unit 302.

(S302) The charge management unit 302 decides the amount of charges based ~~on the basis of~~ the charge history information of the information user, which is stored in the client database 303, and the charge information which is outputted from the data conversion unit 104, and ~~carried out~~ performs the charging process for collecting the charges from the information user by using a method such as electronic payment. This charging process in step S302 will be described in more detail later.

(S107) The transmission unit 107 transmits the data conforming to the information terminal specifications, which is outputted from the data conversion unit 104, to the information terminal 31.

(S303) Further, the charge management unit 302 judges whether the client ID which is outputted from the receiving unit 301 is stored in the client database 303. When the client ID outputted from the receiving unit 301 is stored in the client database 303,

the operation proceeds to step S304, and when the client ID is not stored in the client database 303, the operation proceeds to step S305.

(S304) When the client ID outputted from the receiving unit 301 is stored in the client database 303, the charge management unit 302 appends utilization history information as information concerning the charging which is now performed in step S302, to the utilization history information stored in pair with the client ID, and then ends the processing.

(S305) When the client ID outputted from the receiving unit 301 is not stored in the client database 303, the charge management unit 302 stores the utilization history information as information concerning the charging which is performed in step S302 and the client ID in pair, in the client database 303, and then ends the processing.

~~Next, the~~The charging process shown in step S302 in figure 9 will now be described with reference to figures 10 and 11.

Figure 10 is a flowchart for explaining an example of the charging process by the charge management unit 302 in the information provider apparatus 32 of the third embodiment.

(S401) The charge management unit 302 obtains the charge information which is outputted from the data conversion unit 104.

(S402) The charge management unit 302 obtains the client ID which is outputted from the receiving unit 301.

(S403) The charge management unit 302 checks, by using the

client ID obtained in step S402, whether the utilization history information corresponding to this client ID is included in the client database 303. Consequently, when the utilization history information corresponding to the client ID is included in the client database 303, the operation proceeds to step S404. When the utilization history information corresponding to the client ID is not included in the client database 303, the operation proceeds to step S410. Figure 11 is a diagram showing an example of the client IDs and utilization history information stored in the charge database 106. As shown in ~~this figure 11~~, the client IDs and the utilization history information are registered in pair.

(S404) When the utilization history information corresponding to the client ID is included, the charge management unit 302 obtains this utilization history information.

(S405) Then, the charge management unit 302 compares the utilization history information obtained in step S404 with the charge information obtained in step S401.

(S406) At this time, the charge management unit 302 judges whether the type of presently requested data before data format conversion, which type is indicated by the charge information, is the same as the type of data before data format conversion which is included in the utilization history information. Consequently, when the type of the presently requested data before data format conversion is the same as that which is included in the utilization history information, the operation proceeds to step S407. When

the types are different, the operation proceeds to step S410.

(S407) When the type of the presently requested data before data format conversion is the same as that which is included in the utilization history information, the charge management unit 302 judges whether or not the format of the presently requested data, which is indicated by the charge information, is of lower quality than or the same quality as that of the format of the data after data format conversion, which is indicated by the corresponding utilization history information. Consequently, when the format of the presently requested data is of lower quality than or the same quality as that of the format of the data which is indicated by the utilization history information, the operation proceeds to step S408. When the format is of higher quality, the operation proceeds to step S409.

(S408) When the format of the presently requested data is of lower quality than or the same quality as that of the data format which is included in the utilization history information, the charge management unit 302 judges that the information user ~~has already~~ already has the right to use the presently requested data, and accordingly does not charge the information user.

(S409) When the format of the presently requested data is of higher quality than that of the data format included in the utilization history information, the charge management unit 302 charges the information user with a difference between the amounts of charges which are obtained from the charge data table stored

in the charge database 106, ~~which~~ where the difference results from a difference in the quality of the data, based on the ~~basis of~~ the format of this data after conversion which is included in the charge information and the format of data after conversion included in the utilization history information.

(S410) It is judged that this data request by the information user is a request for data which is different from information that was previously used by the information user, and then the amount of charges is decided by using the charge data table stored in the charge database 106 so as to charge the information user, based on the ~~basis of~~ the charge information ~~similarly similar~~ to the method for deciding the amount of charges as described in the first embodiment.

The charging process which has been described with reference to figure 10 is only an example, and any processing can be performed as long as the charge management unit 302 decides the amount of charges based on the ~~basis of~~ the utilization history information which is stored in the client database 303 and the charge information which is outputted from the data conversion unit 104, and then charges the information user. For example when update data of data which has been already transmitted from the information provider apparatus is transmitted, only differential data from the already transmitted data, which is required for the update data, is transmitted and only the amount of charges for the transmitted differential data is charged.

As described above, according to the data distribution system of the third embodiment, the specifications of the information terminal are automatically transmitted simultaneously with the information provision request to the information provider apparatus. Thereby, the information provider apparatus can transmit image data or music data conforming to the specifications of the information terminal, ~~as well as~~ and the information terminal can receive image data or music data of an ~~optimum~~ optimal data format, whereby excessive data of the like which cannot be reproduced by the information terminal are not transmitted. Further, the information provider apparatus decides the amount of charges according to the format of data which is transmitted to the information terminal, whereby the information user can be properly charged.

Further, according to the data distribution system of the third embodiment, the information provider apparatus includes the client database, whereby the amount of charges can be decided by using the utilization history information as the utilization history of the information user, which is stored in this client database. More particularly, when a client obtains the same image data or music data in different formats by using different information terminals, it is favorable that the client is charged with corresponding ~~optimum~~ optimal charges.

ABSTRACT OF THE DISCLOSURE

~~The present invention provides a~~ data distribution system which enables distribution of data that is suitable for specifications of an information terminal from an information provider apparatus, and which can carry out perform an appropriate charging process for the distributed data. ~~This~~ The data distribution system ~~comprises~~ includes an information terminal which automatically transmits specifications of the information terminal when transmitting an information provision request which requests distribution of information, ~~and~~. The data distribution system also includes an information provider apparatus which receives the information provision request and the information terminal specifications from the information terminal, converts data corresponding to the received information provision request so as to conform to the specifications of the information terminal, ~~and~~ transmits the converted data to the information terminal, ~~as well as~~ decides the amount of charges according to the contents of the data transmitted to the information terminal, and charges the information user using the information terminal.